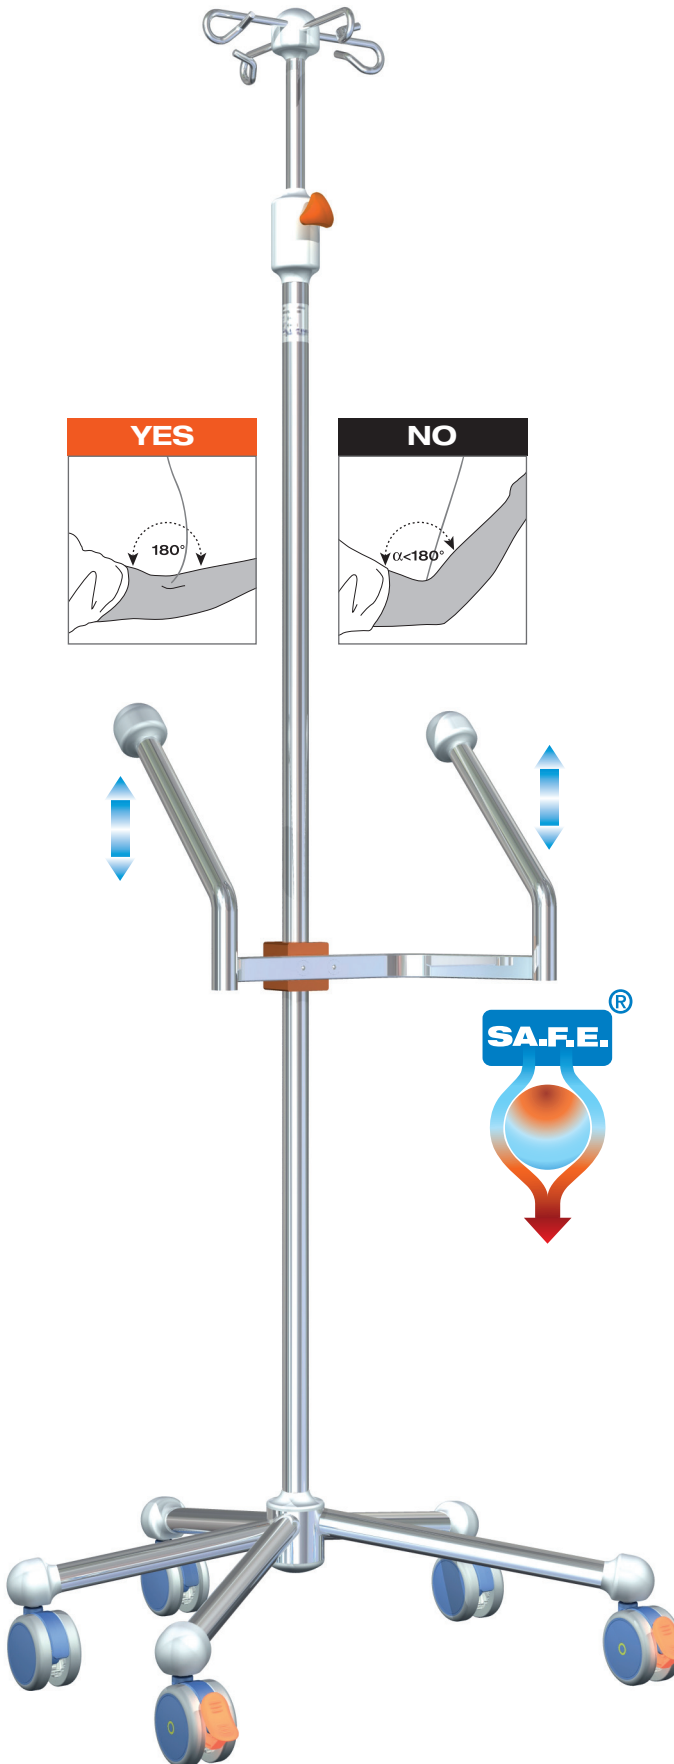




Infusion solution stand for
nfusion therapy with manual height-
adjustment, for simultaneous
assisted walking.

IQI
76

TQI
90



- Indicated for Operating Theatres, Intensive Care Unit, Inpatient Wards, Outpatient Dept., Patient's Home
- Maximum height of the infusion support: **2800 mm**
- Maximum capacity of the device: **5 Kg (walking), 10Kg (static)**
- **Rotating** infusions support with 4 safety hooks in **Austenitic Stainless Steel (AISI 304)**
- Vertical telescopic structure in **Austenitic Stainless Steel (AISI 304)**
- Base with 5 spokes for **walking in Austenitic Stainless Steel (AISI 304)**
- **Handlebar for Walking**
 - Ergonomic
 - Adjustable
 - Autoclavable

SA.F.E. Tech.

Effectiveness
PQI 59,9


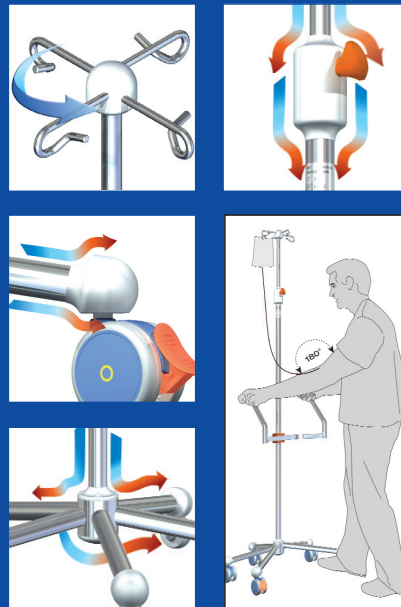
Sanitizability
PQI 76,7



Usability
PQI 87,9

Versatility
PQI 83,3

Systemic Compatibility
PQI 67,9

Environ. Compatibility
PQI 100



Properties of the Device	Ref. Technical-Functional Feature	Features of the Device							Qlf
Versatility	6.2.1	Destination environment	Home	Outpatient Dept.	Ward	N.M.R.	Intensive Care Unit	Operating Theatre	83,33
			OK	OK	OK		OK	OK	
Effectiveness	6.1.2	Maximum height of the Infusion Solution Support (Hsi Max) (+50 / -0)	2800			mm			98,94
Effectiveness	6.1.1	Maximum Capacity (Infusion Solution) (Kg)	Device Max Capacity (M)	5 10 (static)	Individual hook capacity		1,2 2,5 (static)	20,83	
Systemic Compatibility	6.5.5	Infusion Pumps (Accepted weight)	up to 5 Kg (Structural Rod)			up to 5 Kg (HID-ACS10)			50,00
Usability/Sanitizability	6.3.1 6.4.1	Height Adjustment of the Infusion Solution Support	Manual, with friction clamp and safety screw						60,00
Sanitizability	6.3.1	Infusion Solution Support	Austenitic Stainless Steel (AISI 304)						100,00
Usability	6.4.2		N°4 accidental anti-fall hooks for the Solutions (Ø8)						100,00
Usability	6.4.2		Individual hook mechanical strength (Kg)					8	100,00
Usability	6.4.2		Rotating						90,00
Usability	6.4.5		Ergonomics-Infusion Solutions Hook (Niosh Method)	(Hsi Min) Infusion Solution load height = 1600 mm from the ground					
Sanitizability	6.3.2	Vertical telescopic structure (Materials / Tech. / Dimensions)	Austenitic Stainless Steel (AISI 304) (Ø28 / Ø20) Clamp SA.F.E. Technology						100,00
Sanitizability	6.3.2	Ergonomics-Base (Tripping)	Austenitic Stainless Steel (AISI 304) Fittings and Spokes SA.F.E. Technology						100,00
Usability	6.4.5		N°5 spokes for Walking						100,00
Usability	6.4.4	Manageability of the Device (at Max Capacity)	N°5 twin wheels Ø 75 mm			N°2 with Brake			100,00
Sanitizability	6.3.3	Constraints to the Ground							0,00
Sanitizability	6.3.4	Accepted sanitization procedure	Manual/Steam/Atomization/Thermoisinfecteur						100,00
Systemic Compatibility	6.5.1	Dimensions and geometries [mm] Weight [Kg]	Ø 743 x 1727/2800H			7,0 Kg			51,68
Usability	6.4.5	Stability index (Rst Max) <small>(force to apply to the base of the device to determine its overturning)</small>	6,48			Kg			40,88
Usability	6.4.3	Device for the slowed descent of the Infusion Solution Support	YES						100,00
Systemic Compatibility	6.5.2	Devices for elimination of electrostatic charges/electromagnetic comp.	Applied						100,00
Systemic Compatibility	6.5.3	Insensitivity to magnetic fields by NMR	NO						40,00
Systemic Compatibility	6.5.4	Colours Available, Identification, Design	Option available						80,00
Environmental Compatibility	6.6	Resistance to fire/ Latex free / Recyclable	100%	100%	100%			100,00	
Systemic Compatibility	6.5.6	Accessories available in the range HID-ACS.....	0-i-1-2-3-4-5-7-8-10-11-SQ						85,71
Duration through time	6.7	Warranty Option (see confirmation on economic offer)	10			Years			
		Medical device	93/42 CEE Conformity / Class 1 						
Property Quality Indicators (PQI)									
	6.1		Effectiveness						59,9
	6.3		Sanitizability						76,7
	6.4		Usability						87,9
	6.2		Versatility						83,3
	6.5		Systemic Compatibility						67,9
	6.6		Environmental Compatibility						100,0
	(5 x (Effectiveness+Sanitizability+Usability) + 1 x (Versatility + Syst.Comp.+Environmental Comp.))/ 18						Intrinsic Quality Indicator (IQI)	76	
	6.7							TOTAL INTRINSIC QUALITY through TIME Indicator (TQI)	90